




Pevalit G15

Gypsum Plaster

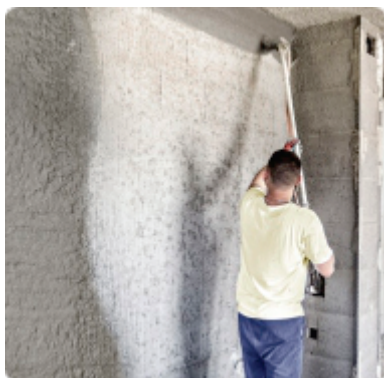

APPLICATION

- Plaster on gypsum base.
- Has the role of a base plaster, and after drying is finalized as an even final layer.
- For plastering of walls and ceilings, in indoor spaces.
- Sprayed by hand or by machine.
- Layer thickness between 1 and 3 cm.
- Before use in places of smooth and gasbeton concrete, binding liquid needs to be used.

Layer Thickness	Consumption	Surface Covered with 25kg PEVALIT - G15
10 mm	approx. 15 kg/m ²	approx. 1.7 kg/m ²
15 mm	approx. 19 kg/m ²	approx. 1.3 kg/m ²
20 mm	approx. 25 kg/m ²	approx. 1.0 kg/m ²

- Sanding:** From 0-1 mm.
- Working time in container:** approximately 1 hour after mixing.
- Layer thickness:** between 0.8 and 3 cm.
- Dry mass density:** 1800 kg/1m³
- Steam permeability coefficient:** ca.23.
- Norm:** MKC EN 13279-1:2006.
- Pressure durability (after 28 days):** CS I, ca. 2.5 N/mm².
- Purpose and Water absorption:** GP, W0.
- Temperature conductivity:** 0,75 W/mK.
- Reaction to fire:** A1.
- Work temperatures:** +5°C - +30°C.
- Mixing with water:** with approximately 7.5 l/25kg.
- Material color:** Grey.
- Packaging:** 25 kg.
- Best before:** In the original packaging 12 months, in a warehouse without moisture.