






Pevalit

G4

Cement Mortar

APPLICATION

- Mortar based on cement.
- For plastering walls and ceilings, in indoor and outdoor rooms.
- It is applied by machine or by hand.
- Thickness of the layer from 1 to 4 cm.
- Before use in smooth concrete and gas concrete surfaces, a liquid binder should be used.

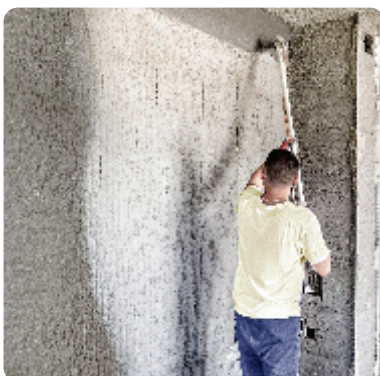

Layer Thickness	Consumption	Surface Covered with 25kg PEVALIT - G4
10 mm	approx. 17 kg/m ²	approx. 1.5 kg/m ²
15 mm	approx. 25 kg/m ²	approx. 1 kg/m ²
20 mm	approx. 32 kg/m ²	approx. 0.8 kg/m ²

- Sanding:** From 0-1.5 mm.
- Layer thickness:** Between 0.8 mm and 4 mm.
- Dry mass density:** 1800 kg/1m³
- Steam permeability coefficient:** ca.23.
- Norm:** MKC EN 998-1/Kop: 2006.
- Pressure durability (after 28 days):** CS II, ca. 3.2 N/mm².
- Purpose and Water absorption:** GP, W0.
- Temperature conductivity:** ≤0,75 W/mK.
- Reaction to fire:** A1.
- Work temperatures:** +5°C - +30°C.
- Mixing with water:** with around 7.2 l/25kg
- Material color:** Grey.
- Packaging:** 25 kg.
- Best before:** In the original packaging 12 months, in a warehouse without moisture.