





Pevalit N XS

Quick Self leveling
compound

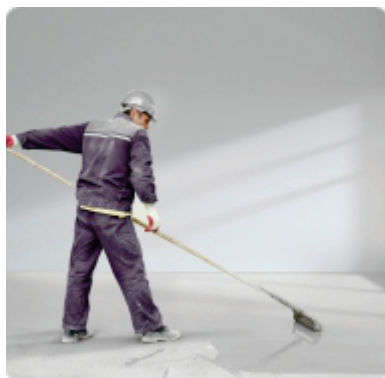

APPLICATION

- Modified material for quick solidification after use, leveling an uneven layer, or leveling two uneven layers.
- As the penultimate layer before the laying of flooring for example tiles, parquet, PVC, carpet, or covering the floor with industrial colors.
- Layer thickness between 6 and 30 mm.
- Is applied over layers of concrete, dry concrete or wet, flooring with central heating, old ceramic tiles, granite, marble, porcelain, etc.
- Use in indoor and outdoor environments.
- Surfaces where NIVOMAS N XS is applied need to be solid, clean, dust-free and fat-free.
- Layers that absorb a lot of water (porous), for example concrete or dry concrete, need to be varnished with binding hydrophobic liquid.
- During usage there cannot be stoppage of work, and the material must not come into contact with the walls.

Layer thickness	Consumption	Surface Covered with 25kg PEVALIT - N XS
3 mm	approx. 6 kg/m ²	approx. 4 m ²
6 mm	approx. 12 kg/m ²	approx. 2.1 m ²
10 mm	approx. 20 kg/m ²	approx. 1.2 m ²
30 mm	approx. 60 kg/m ²	approx. 0.4 m ²

Working time: up to 20 min.

Operating temperatures: +5°C - +30°C

Resistant to temperatures: -20°C - +70°C

Norm: EN 13813 CT-C20-F5

Stepping over the surface: after 10-24 hours.

The measurements were performed on a temper. around 22°C

Treading over the surface with weight: after 5-7 days.

Bonding of porcelain tiles, artificial granite, natural granite and marble, concrete tiles, stone tiles, ceramic tiles, etc.: After 2 days

Bonding of PVC, parquets, laminates, etc.: After 7 days

Mixing with water: approximately 5 min., with about 6.5-7 l / 25 kg.

Packaging: 25 kg.

Material color: gray

Shelf life: 12 months in original packaging. Store in a place without moisture.