




# Pevalit

## SILIKAT- FASSADENFARBE

Facade Paint based on  
Potassium water glass  
Acryl-Copolymer

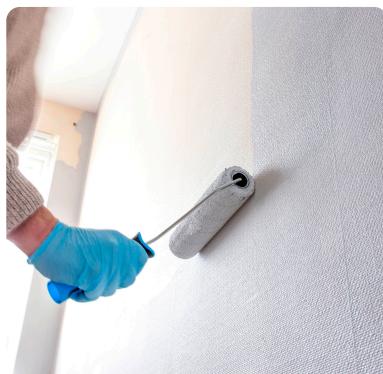

## APPLICATION

- Ecological facade paint based on Potassium water glass-Acryl-Copolymeri.
- Used over layers of mineral and acrylic decorative plaster.
- Resistant to atmospheric conditions, rain, sun, frost, friction, UV rays, etc.
- PEVALIT- SILIKAT-FASSADENFARBE can be diluted with PEVALIT- Silikatverdünner.
- Surfaces where PEVALIT-SILIKAT-FASSADENFARBE needs to be used, must be hard, fat-free and dry.
- Is applied with roller or brush.

## TECHNICAL PARAMETERS

- Material density:** approx. 1.56 g/cm<sup>3</sup>.
- Work temperatures:** +8°C - +30°C.
- Spending:** approx. 150-200 ml/m<sup>2</sup>. / 200-250 ml/m<sup>2</sup>.
- Drying:** 10 hours based on temp. approx. 20°C. and 65% air humidity.
- Cleaning of tools:** After finishing work with water.
- Material color:** White.
- Packaging:** 5 l, 15 l.
- Best before:** In the original packaging 12 months, in a warehouse sheltered from frost.