




APPLICATION

Pevalit

SILIKONHARZ- FASSADENFARBE

Facade Paint
based on Silicone
Acrylat-Copolymer

- Ecological facade paint based on Potassium water glass-Acryl-Copolymeri.
- Used over layers of mineral and acrylic decorative plaster.
- Resistant to atmospheric conditions, rain, sun, frost, friction, UV rays, etc.
- Surfaces where PEVALIT - SILIKONHARZ - FASSADENFARBE needs to be used, must be hard, fat-free and dry.
- Is applied with roller or brush.

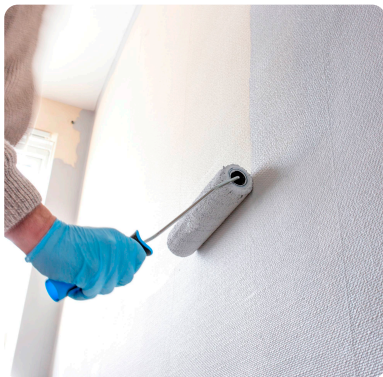

TECHNICAL PARAMETERS

- Material density:** approx. 1.6 g/cm³.
- Steam permeability coefficient:** Class I high, sd-value: ↓ 0,14 m.
- Purpose and Water absorption:** Class III low, W24-value ↓ 0,1 kg/(m²h0,5)
- Mixing with water:** 5-10%.
- Work temperatures:** +5°C - +30°C.
- Spending:** approx. 150-200 ml/m². / 200-250 ml/m².
- Drying:** 12 hours based on temp. approx. 20°C. and 65% air humidity.
- Cleaning of tools:** After finishing work with water.
- Material color:** White.
- Packaging:** 5l, 15l.
- Best before:** In the original packaging 12 months, in a warehouse without moisture.