




# Pevalit

## TIEFGRUND LF

Reinforcing liquid

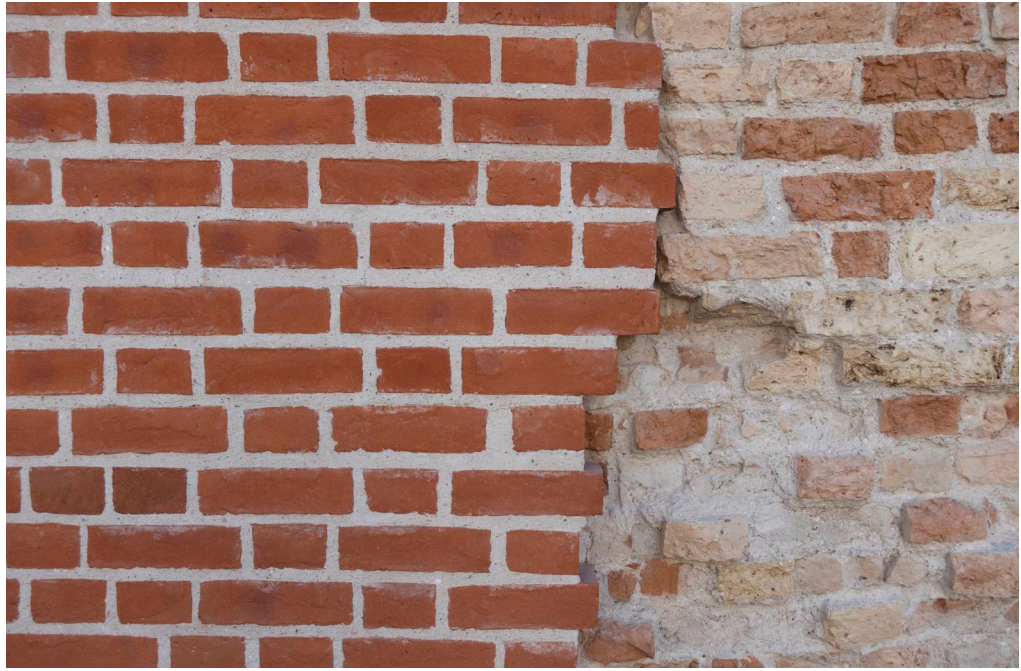

## APPLICATION

- Impregnating binding liquid for indoor and outdoor environments.
- Has the role of repairing damaged layers of concrete, plaster, decorative plaster, paints, layers that absorb moisture, etc.
- Is applied with roller, brush or pump.
- Layers that absorb moisture need to be dust-free and dry, then PEVALIT-Tiefengrunt LF should be applied with a pump in a 1:1 water mixture.

## TECHNICAL PARAMETERS

- Material density:** approx. 1.01/cm<sup>3</sup>.
- Work temperatures:** +5°C - +30°C.
- Mixing with water:** max. 1:1.
- Spending:** approx. 150-200 ml/m<sup>2</sup>.
- Drying:** 6-8 hours based on temp. approx. 20°C. and 65% air humidity.
- Cleaning of tools:** After finishing work with water.
- Material color:** White.
- Packaging:** 5l, 10l.
- Best before:** In the original packaging 12 months, in a warehouse sheltered from frost.